


- a). DUST COLLECTORS UP TO PF - 32 HAVE ONE INLET AND ONE OUTLET, PLACED AT ONE OF THE FILTER SIDES
- b). DUST COLLECTORS FROM PF 40 UP TO PF-64 HAVE MORE OUTLET OPENINGS PLACED AT THE REVERSED SIDE OF COMPRESSED AIR BLOWING IN SYSTEM.
- c). DUST COLLECTORS FROM PF-40 UP TO PF-64 HAVE MORE INLET OPENINGS, WHICH CAN BE PLACED AT THE RIGHT OR AT THE LEFT FILTER SIDE

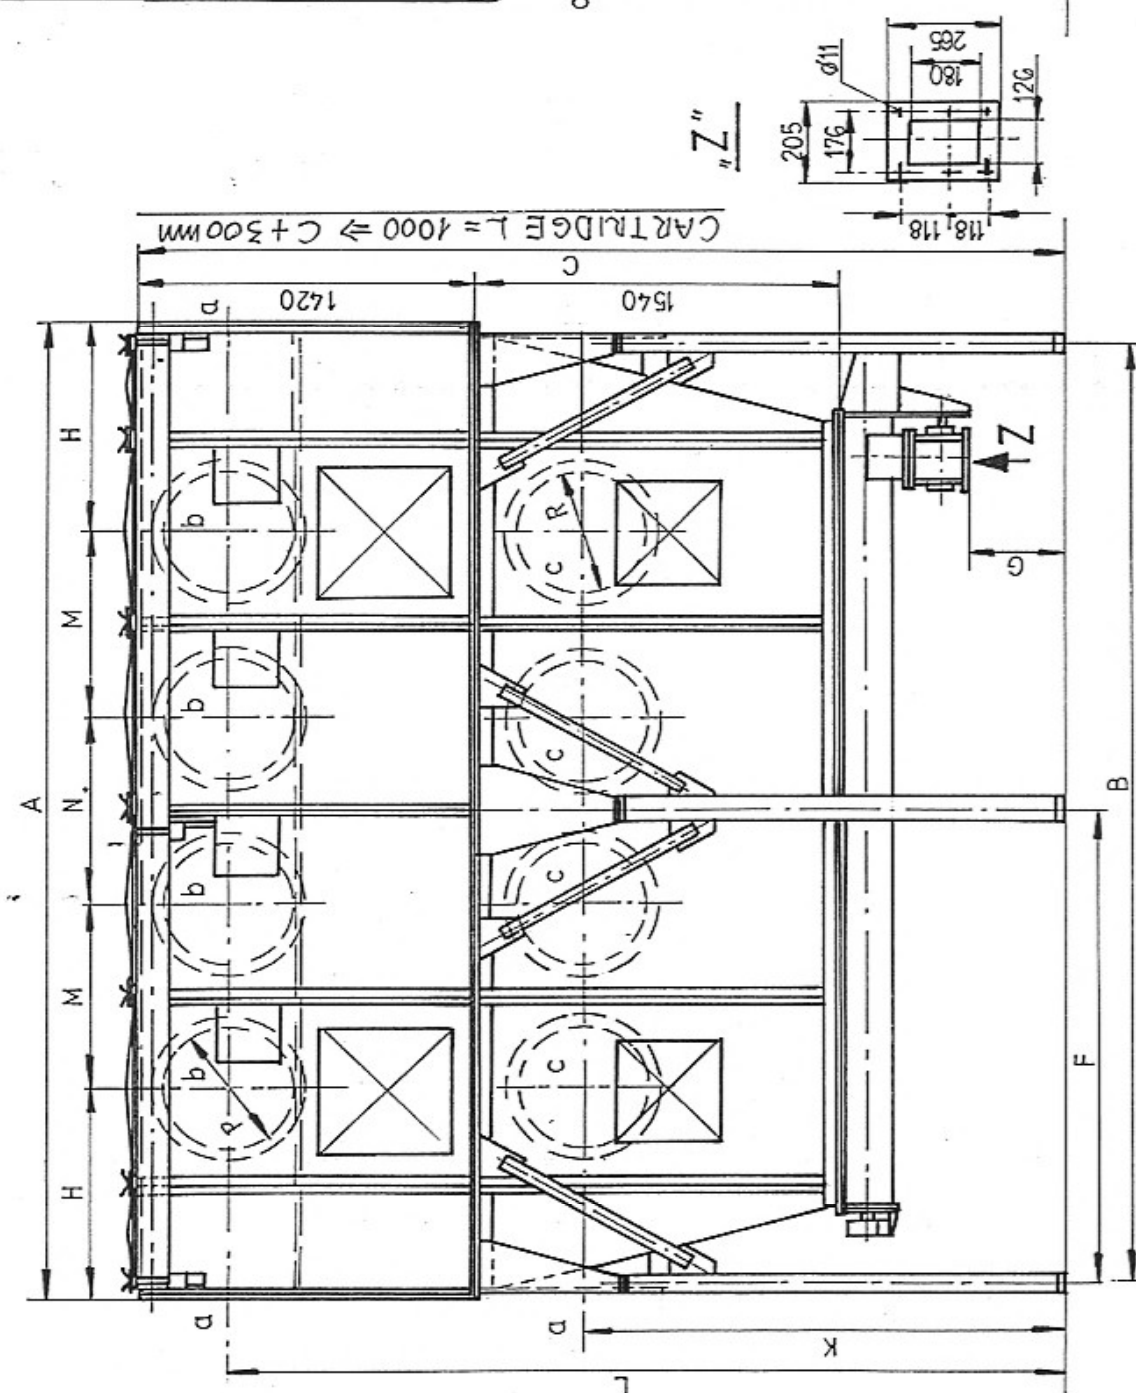

| Type | A | B | C | D | E | F | G | H | J | K | L | M | N | P | R | Capacity | Nr. of valves | Elmot. power | Weight | Code N° |
|---------|------|------|------|------|------|---|------|------|-----|------|------|------|------|-----|-----|-------------|---------------|--------------|--------|---------|
| PF - 24 | 2720 | 2546 | 4000 | 3600 | 2135 | | 550 | | 600 | | | | | | | 12800-19200 | 12 | 15 | 1900 | 8110 |
| PF - 32 | 3560 | 3386 | 4000 | 3640 | 2180 | | 550 | | 600 | | | | | | | 17100-25600 | 16 | 15 | 2680 | 8000 |
| PF - 40 | 4400 | 4226 | 4900 | | | | 1395 | 940 | | 2900 | 4390 | 2520 | | 500 | 500 | 21300-32000 | 20 | 15 | 3100 | 3558 |
| PF - 48 | 5240 | 5066 | 4700 | | | | 1195 | 940 | | 2700 | 4190 | 840 | 1680 | 500 | 500 | 25300-39400 | 24 | 15 | 3400 | 7983 |
| PF - 56 | 6080 | 5906 | 4700 | | | | 2953 | 1275 | 940 | 2800 | 4290 | 840 | 2520 | 500 | 500 | 29900-44900 | 28 | 22 | 4620 | 7451 |
| PF - 64 | 6920 | 6740 | 4900 | | | | 3370 | 1250 | 940 | 2800 | 4290 | 1690 | 1680 | 500 | 500 | 34770-51000 | 32 | 22 | 4700 | 3887 |